

Mak Dublin:
Tel: 01-4519900 / Fax: 01-4519004
E-Mail: sales@makfasteners.com

Mak Cork:
Tel: 021-4342890 / Fax: 021-4342396
E-Mail: corksales@makfasteners.com

Mak (NI):
Tel: 028-86758574 / Fax: 028-86758578
E-Mail: salesni@makfasteners.com



**MAK
FASTENER
SPECIALISTS
LTD**

Fasteners for Roofing, Cladding
and General Construction

Product Group 11 *Filler Blocks*

Description


Profile Fillers supplied in Polyethylene, EPDM, High Density Metallocene polyolefin & EPDM Laminate, vented if necessary

Typical Application

For sealing roofing & cladding profiles against dust, water and water vapour ingress.

PREMIER

Adhesive Systems Ltd
Sealant Systems Ltd

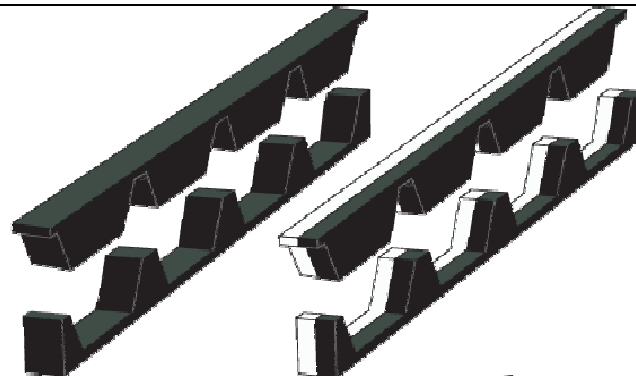

Standard Black

Black & White

Skew Cut

Vented

Standard Stock Profiles

- Kingspan KS1000 RW, Low Pitch, Kingzip, Top Deck & Roof Tile
- Tegral R40, Tegral R33, Tegral Shadowline, Tegral D60, Tegral CL-5, Tegral Mini Rib, Tegral 32/960 & Tegral Aluseam
- Ward 37/1000
- Tac Panel, TAC R34, TAC R31, TAC C38 & TAC 39B
- Rollform
- Trisomet
- European Profiles
- Euro-Clad

Mak Dublin:
Tel: 01-4519900 / Fax: 01-4519004
E-Mail: sales@makfasteners.com

Mak Cork:
Tel: 021-4342890 / Fax: 021-4342396
E-Mail: corksales@makfasteners.com

Mak (NI):
Tel: 028-86758574 / Fax: 028-86758578
E-Mail: salesni@makfasteners.com



**MAK
FASTENER
SPECIALISTS
LTD**

Fasteners for Roofing, Cladding
and General Construction

Product Group 11 Filler Blocks

Product Features

Premier fillers are supplied:

- made-to-measure
- in a range of materials, thicknesses & colours
- ventilated (tops off or nicks to base)
- self-adhesive (to base and/or profile)
- with extended base
- in spacer & strip form
- angle-cuts

Typical Applications

- Sealing eaves
- Sealing ridges
- Sealing rooflights

Technical Information

Supplier Code	J25 /J30	H30 /H50	J50	M25 / M30	K25 / K30	E25
Type	Standard	High Density	50mm Thick	High Tensile	Laminate	EPDM
Material	Fully closed cell cross linked PE	Fully closed cell cross linked PE	Fully closed cell cross linked PE	Metallocene catalysed polyolefins	Fully closed cell cross linked PE faced with EPDM	Fully closed cell EPDM
Colour	Black, White Black & White	White	White	Black or White	Black	Black or White
Thickness	25 & 30mm	30 & 50mm	50mm	25 & 30mm	25 & 30mm	25mm
Density (kg/m ³)	33	45	33	33	40	100 - 150
Service temp. (°C)	-70 - +95	-70 - +110	-70 - +95	-70 - +100	-40 - +70 intermittent to +100	-50 - +70 intermittent to +100
Water absorption	0.5% 28 days	0.5% 28 days	0.5% 28 days	0.5% 28 days	0.35% 28 days	0.125% 28 days
Durability (dependent upon conditions)	20 years	20 years	20 years	20 years+	20 years	20 years