


MAK Dublin:
Tel: 01-4519900 / Fax: 01-4519004
E-Mail: sales@makfasteners.com

MAK (NI):
Tel: 028-867 58574 / Fax: 028-867 58578
E-Mail: salesni@makfasteners.com

MAK Cork:
Tel: 021-4342890 / Fax: 021-4342396
E-Mail: corksales@makfasteners.com

MAK (UK):
Tel: 0161-866 8164 Fax: 0161-866 9963
E-Mail: uksales@makfasteners.com

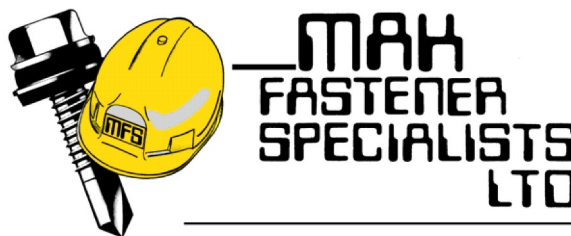

**INSULATION &
MEMBRANE TO
STEEL DECK
0.63mm TO 1.25mm
THICK**



BS 6.1mm

PRODUCT DESCRIPTION

- For use with Guardian Tube system
- Torx 25 Drive Head
- Drillpoint (drilling capacity 2 x 1.25mm)
- Packed in buckets
- ETA Approval 08/0285
- FM Approval No. 3034551
- Screw for extra high pullout resistance
- Enduroguard Coating, 15 cycles

Code	Description
19-BS-61060	6.1x60mm Guardian BS Roofing Screw
19-BS-61080	6.1x80mm Guardian BS Roofing Screw
19-BS-61100	6.1x100mm Guardian BS Roofing Screw
19-BS-61120	6.1x120mm Guardian BS Roofing Screw

Substrate	Pull-Out Value
Steel 0.63mm	1.9kN
Steel 0.75mm	2.1kN
Steel 0.88mm	2.5kN
Steel 1.25mm	3.5kN

Based on 20mm Fastener Penetration

R75 Standard ✓ 	R45 Standard ✓ 	 
RB48 Standard ✓ 	